

ARD101 Tutorial Conversion

February 22, 2014

Public Domain

Software Version	Date
0.0.0.1	02/15/14

Contents

1	OSEPP™ 101 Arduino Basics Starter Kit	2
1.1	Atmel Studio 6	2
1.1.1	328eForth v2.20	3
1.2	SwiftX for AVR	3
2	Tutorials	4
2.1	Tutorial 1: Loading the First Sketch	4
2.1.1	Tutorial1	5
2.1.2	flasher.txt	6
2.1.3	distress.f	7
2.2	Tutorial 2: Controlling Digital Outputs	7
2.2.1	Tutorial2	7
2.2.2	cycle.txt	8
2.3	Tutorial 3: Using Digital Input	9
2.3.1	Tutorial3	9
2.3.2	button.txt	10
2.4	Tutorial 4: An LED Game	11
2.4.1	Tutorial4	11
2.4.2	game.txt	13
2.5	Tutorial 5: Building Voltage Meter	14
2.5.1	Tutorial5	14

2.6	Tutorial 6: Using Buzzer to Play a Melody	14
2.6.1	Tutorial6a	15
2.6.2	Tutorial6b	16
2.7	Tutorial 7: Counting Down with a 7 Segment LED	19
2.7.1	Tutorial7	19
2.8	Subsection Title	20
2.8.1	SubSubsection Title	20

1 OSEPP™ 101 Arduino Basics Starter Kit

This ARD101 project started when Fry's put this kit on sale for \$35.99.

<http://osepp.com/products/kits/101-arduino-basic-starter-kit/>

It contains an UNO R3 Plus processor, which is compatible with, at least, Dr. Ting's 328eForth for Arduino.

<http://www.offete.com/328eForth.html>

It is probably also compatible with amForth and SwiftX AVR, but I haven't gotten those working yet.

<http://amforth.sourceforge.net/>

<http://www.forth.com/downloads/SwiftX-Eval-AVR-3.7.1-f4qbm8hnnrg5r42ko.exe>

The Kit also contains all the parts needed to complete 7 different tutorials involving flashing LEDs, playing tones and reading voltages and GPIOs, which can provide a very basic comparison between the C and Forth programming languages. Unfortunately, while the Kit is complete for programming in C, you still need an additional AVR ISP programmer to work with Forth. While Atmel does sell one that is very mature, I decided to try to find one that was a little smaller. After a couple of misfires, I went back to the one recommended by Leon Wagner from Forth, Inc. at the February 2011 SVFIG meeting:

<http://www.forth.org/svfig/kk/02-2011.html>

<http://www.pololu.com/product/1300/>

1.1 Atmel Studio 6

The Kit does require it's own software. ARDUINO 1.0.5-r2 - 2014.01.08 is the latest version, but I ended up using ARDUINO 1.5.5-r2 BETA 2014.01.10 to support my Windows 8.1 computer.

<http://arduino.cc/en/Main/Software>

While SwiftX is self contained, amForth and eForth require a separate assembler and compiler system. The most recent is Atmel's Studio 6 (Version 6.1.2730 - Service Pack 2).

<http://www.atmel.com/tools/ATMELSTUDIO.aspx>

Getting all of this setup is a much more significant part of the problem than it needs to be, but then again, supporting all of the updates of all of the pieces is certainly an expensive proposition. I just wish more vendors considered it to be a priority. OSEPP is doing a better job than most, but even they are at the mercy of the Arduino open-source community, and Win8.1 is causing most companies issues with their driver security requirements.

<http://dottech.org/130197/how-to-bypass-digital-signed-driver-message-windows-8-8-1/>

Atmel has also gone through many variations to its compiler suite, and with this latest version, they chose to use Microsoft's Visual Studio as the IDE for their compiler. They are still stuck in the VS2010 version, but at least they have a reasonable update

mechanism and they do provide the older version for the less adventurous. I personally believe in continuous integration, so I still am struggling to figure out how to get amForth to work. Dr. Ting's eForth was not too difficult, but the Pololu programmer instructions have not been updated to the latest menus in Studio 6. The instructions that say to "select Add STK500... from the Tools menu" should actually be to select Add target... and Select the STK500 tool. A minor but frustratingly significant difference.

1.1.1 328eForth v2.20

Once I finally got everything setup properly, I was able to backup the existing flash image, which is essential if you want to return to the Kit's original Tutorials. Dr. Ting's instructions also say to set the High Fuse byte to 0xD8, which I have so far, found to be unnecessary and the original setting of 0xDE (BOOTSZ = 256W_3F00) works the same. Once I flashed the **328eforth.hex** and connected the serial port to PuTTY, I got the following:

```
328eForth v2.20
ok
words
  VARIABLE CONSTANT CREATE IMMEDIATE : ] ; OVERT ." $" ABORT" WHILE ELSE AFT THEN
REPEAT IF AGAIN UNTIL NEXT FOR BEGIN LITERAL COMPILE [COMPILE] , IALLOT ALLOT
D- D+ D> > 2- 2+ 1- 1+ READ WRITE ERASE COLD WORDS .S IDUMP DUMP ' QUIT EVAL [
QUERY EXPECT NAME> WORD CHAR \ ( .( ? . U. U.R .R CR ITYPE TYPE SPACES SPACE KEY
NUMBER? DECIMAL HEX #> SIGN #S # HOLD <# FILL CMOVE @EXECUTE TIB PAD HERE ICOUNT
COUNT +! PICK DEPTH */ */MOD M* * UM* / MOD /MOD M/MOD UM/MOD WITHIN MIN MAX <
U< = ABS - DNEGATE NEGATE INVERT + 2DUP 2DROP ROT ?DUP BL 2/ 2* LAST DP CP
CONTEXT HLD 'EVAL 'TIB #TIB >IN SPAN TMP BASE 'BOOT UM+ XOR OR AND 0< OVER
SWAP DUP DROP >R R@ R> C@ C! FLUSH I! IC@ I@ @ ! EXIT EXECUTE EMIT ?KEYok
ok
```

So now, I can start translating the tutorials.

1.2 SwiftX for AVR

<http://www.forth.com/embedded/eval-upgrade.html?MCU=AVR>

Initially, I was stuck in the SwiftX AVR Target Reference Manual, Appendix A.1.1 Uno Board Overview. I was trying to get the RELOAD! command to work, but it would not work with the Pololu USB AVR Programmer. Once I got it working as an STK500 in Atmel Studio, and read further in Appendix D: Atmel STK500, I saw that this is the "normal" way to use this interface. So, now I can start including that system in the translation too.

```
SwiftX Evaluation AVR 3.7.0 01-Jan-2014
```

```
INCLUDE DEBUG
```

Start	End	Size	Used	Unused	Type	Name
0000	7FFF	32768	7308	25460	CDATA	FLASH
0100	01FF	256	29	227	IDATA	IRAM
0200	08FF	1792	421	1371	UDATA	URAM

```
TARGET READY
```

```
SwiftX/AVR Arduino Uno SOS Demo ok
```

```
2 6 + . 8 ok
```

```
go
```

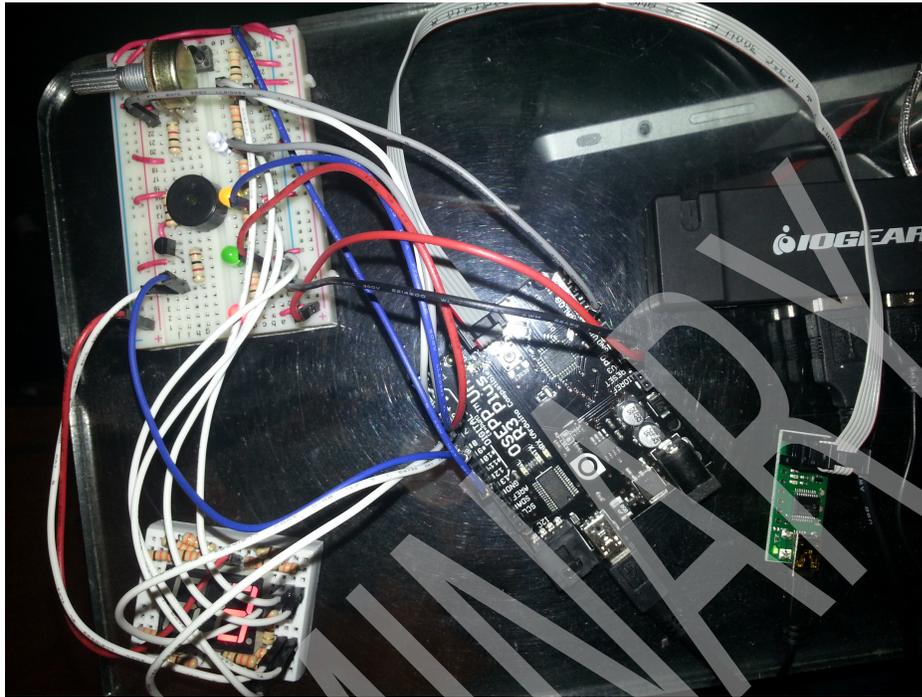


Figure 1:

TARGET READY ok

2 Tutorials

Starting from OSEPP's learning center, I have shortened the URL for each of the subsections below to fit on a printed page.

<http://osepp.com/learning-centre/start-here/101-basic-starter-kit/>

<http://tinyurl.com/megobz3>

I have also setup the hardware interfaces so that all 7 of the tutorials are connected at the same time. The only overlap that this creates is with the 7 segment LED. This just means that the speaker clicks during the LED tutorial, but otherwise, all of the I/O used in the tutorials functions properly

2.1 Tutorial 1: Loading the First Sketch

<http://tinyurl.com/megobz3/tutorial-1-loading-the-first-sketch/>

This tutorial looks to be well represented in the **flasher.txt** sample that is included with eForth. However, 1st you need to have a terminal emulator that can send text files with a 900 ms delay in between lines. 900 ms is probably way too slow, but the system can not handle no delay between lines. 200 ms seems about right. Unfortunately, PuTTY can not do this. Realterm is a reasonable substitute, but scrollbar is an issue.

<http://realterm.sourceforge.net/>

I've always preferred the capabilities of HyperACCESS, which is the parent of Windows old HyperTerminal. It's expensive, but I've seen issues with just about any other terminal program and I don't recall ever finding an issue with HyperACCESS. They also still sell the original HyperTerminal Private Edition if you want something less expensive.

<http://www.hilgraeve.com/hyperaccess-trial/>

With decent scrollback capabilities, I was able to see that **flasher.txt** required **io-core.txt** which was not loading properly. Eventually, I figured out that I needed to load **marker.txt** 1st. Even Dr. Ting's documentation has a mistake there in that **hello-world.txt** also requires **marker.txt**, but in the end, the system can finally be considered to be functional.

1000 3 manyok

Note that the "ok" doesn't output a space first, so the acknowledgment can be a little confusing.

2.1.1 Tutorial1

```
5 <Tutorial1.ino 5>≡
  /* Tutorial 1
  Blink
  Turns on an LED on for one second, then off for one second, repeatedly.
  This example code is in the public domain.
  */
  // Pin 13 has an LED connected on most Arduino boards.
  // give it a name:
  int led = 13;
  // the setup routine runs once when you press reset:
  void setup() {
  // initialize the digital pin as an output.
  pinMode(led, OUTPUT);
  }
  // the loop routine runs over and over again forever:
  void loop() {
  digitalWrite(led, HIGH); // turn the LED on (HIGH is the voltage level)
  delay(1000); // wait for a second
  digitalWrite(led, LOW); // turn the LED off by making the voltage LOW
  delay(1000); // wait for a second
  }
```

2.1.2 flasher.txt

William F. Ragsdale had written these demo applications for Arduino with AmForth. Dr. Ting modified them so that they work properly under 328eForth.

```
6 <flasher.txt 6>≡
  \ FLASHER.txt to Demo LED control           WFR 2011-01-27
  ( must have io-core.txt installed )
  chop-flasher
  marker chop-flasher ( a forget point)
  $23 value PortB $26 value PortC $29 value PortD
  5 value LED
  : 1-cycle ( ms_delay --- flash LED on then off )
    PortB LED PoBiHi dup ms PortB LED PoBiLo ms ;
  : many ( on_time flashes --- produce controlled LED flashes)
    PortB LED PoBiOut ( set LED pin as output)
    for aft dup 1-cycle then next drop ;
  ( use 'many' leading with on-time and # of flashes )
  ( end of flasher.txt )
  flush
```

Note that in both C and Forth, there are many support routines that are not always listed. Knowing the environment is always key to your productivity and you can usually learn a lot by examining the sample source listings. You should also notice that the **setup** and **loop** functions need to be done explicitly in Forth. You can always assume that you need to do those steps, but how often and in what order is typically, an application specific requirement. Thus the use of parameters is more typical in Forth than infinite loops.

You should also notice that while the C routines deal with sequential pins which span multiple ports, the Forth routines deal with the port bits directly. The onboard LED is on pin 13, but it can also be referenced as bit 5 on Port B. The lower 8 pins are on Port D.

2.1.3 distress.f

An onboard LED example is also included in SwiftX AVR, but it is listed as Copyright 2001-2007 FORTH, Inc. You should look at it and execute it to make sure everything is working properly. However, I will not list it here to avoid any copyright infringement. It is interesting to note that this example puts the **SOS** distress code into a background **BEACON** task, which allows it to continue running while you continue to exercise the tether interface. This is extremely useful, but for compatibility, I will not use it for the rest of these tutorials. Instead, I will attempt to use the same code on all of the Forth systems.

2.2 Tutorial 2: Controlling Digital Outputs

<http://tinyurl.com/megobz3/tutorial-2-controlling-digital-outputs/>

500 3 cyclesok

2.2.1 Tutorial2

```
7 <Tutorial2.ino 7>≡
  /*
  Tutorial 2 Digital Output
  */
  int LED0 = 2;    // Use digital pin 2 to drive the white LED
  int LED1 = 3;    // Use digital pin 3 to drive the yellow LED
  int LED2 = 4;    // Use digital pin 4 to drive the green LED
  int LED3 = 5;    // Use digital pin 5 to drive the red LED
  void setup() {
    // initialize digital pin 2 to 5 as output:
    pinMode(LED0, OUTPUT);
    pinMode(LED1, OUTPUT);
    pinMode(LED2, OUTPUT);
    pinMode(LED3, OUTPUT);
  }
  void loop(){
    // Toggle each LED at a time with a 500ms delay
    digitalWrite(LED0, HIGH);
    delay(500);
    digitalWrite(LED0, LOW);
```

```

delay(500);
digitalWrite(LED1, HIGH);
delay(500);
digitalWrite(LED1, LOW);
delay(500);
digitalWrite(LED2, HIGH);
delay(500);
digitalWrite(LED2, LOW);
delay(500);
digitalWrite(LED3, HIGH);
delay(500);
digitalWrite(LED3, LOW);
delay(500);
}

```

2.2.2 cycle.txt

```

8 <cycle.txt 8>≡
\ cycle.txt to Demo multiple LED control      DaR 2014-02-16
chop-cycle
marker chop-cycle
\ Define LED port bits and flashing order
CREATE LEDES 4 2* 1 + allot \ Number of LEDES, then order
: \LEDES ( --- Initialize the RAM array ) 4 LEDES C!
  LEDES count 2* PortD fill \ Overfill the Port addresses to save code
  2 LEDES 1 + C! 3 LEDES 3 + C! 4 LEDES 5 + C! 5 LEDES 7 + C! ;
: cycle ( time port bit --- flash LED on then off )
  2dup PoBiHi rot dup ms rot rot PoBiLo ms ;
: cycles ( time cycles --- produce cycles of LED flashes ) \LEDES
  LEDES count for aft count >r count r> PoBiOut then next drop
  for aft LEDES count for aft count >r count >r over r> r>
  cycle then next drop then next drop ;
flush

```

Note a few principles here:

1. Look for patterns of doing things 3 or more times and factory them out. Each LED name was used 3 times, which leads to putting them into an array, which only needs to be referenced twice. This also allows a significant reduction in code size.
2. Be careful where things are compiled when systems have multiple address spaces. I had thought that `,` would work to create the table, but no, I had to resort to a much less elegant solution.
3. Still, the lack of elegance is at compile time and does not effect the run time behavior. That makes it much less objectionable.
4. Last minute ugliness is the requirement for a **flush** before **LEDS** can be referenced. Otherwise, the system would reboot while compiling this code. That's the risk for compile time initialization and thus, why it is now in a definition and called everytime **cycles** starts up. This gives it some runtime overhead, but saves compatibility issues with other systems.
5. Don't be afraid of passing multiple parameters. Up to 3 parameters are easily handled in Forth and even more can be handled with minimal difficulties. Watch for literals or fixed values that might change over time, like the LED parameters here in the **cycle** routine. The original **1-cycle** routine could have been written this way with some forethought.
6. Know when to stop factoring things out. I could have broken **cycles** down into, at least, 2 other words. However, again you should remember the rule of 3. I might use a similar pattern 1 more time in the next tutorial, but as with most test code, a 3rd time is unlikely.

2.3 Tutorial 3: Using Digital Input

<http://tinyurl.com/megobz3/tutorial-3-using-digital-input/>

2.3.1 Tutorial3

```

9  <Tutorial3.ino 9>≡
    /*
    Tutorial 3 Digital Input
    */
    const int buttonPin = 12;    // Use digital pin 12 for the button pin
    int buttonState = 0;        // variable for storing the button status
    void setup() {
        // initialize the pushbutton pin as an input:
        pinMode(buttonPin, INPUT);
        // initialize the serial port;
        Serial.begin(9600);    // start serial for output
    }
    void loop() {
        // read the state of the pushbutton value:
        buttonState = digitalRead(buttonPin);
        // Output button state
        Serial.print("The button state is ");
        Serial.println(buttonState);
    }

```

```
// Delay 1000ms
delay(1000);
}
```

2.3.2 button.txt

```
10 <button.txt 10>≡
  \ button.txt to Demo Digital input      DaR 2014-02-17
  chop-button
  marker chop-button
  4 value buttonPin \ Use digital pin 12 for the button pin
  : states ( --- read state of button )
    PortB buttonPin 2dup PoBiIn PoBiRead
    begin PortB buttonPin PoBiRead 2dup - if
      cr ." The button state is " dup . swap
    then drop ?key until drop ;
  flush
```

A few more principles:

1. For testing words, like these, it is often convenient to just wait for a key press to terminate the loop. You have an interactive terminal loop running anyway. You might just as well use it. However, be warned that eForth appears to have a bug with **until**. The **drop**, or anything else after **until**, never executes. Not a big problem here, and I have reported it.
2. We also don't need to initialize the serial port because it is the terminal loop. I suspect that this may not always be the case.
3. Don't add things that you don't use. Note that **buttonState** is not needed in Forth, when the stack can hold the state.
4. Don't time a polled event if you don't need to. There's no need to report the state unless it changes.

2.4 Tutorial 4: An LED Game

<http://tinyurl.com/megobz3/tutorial-4-an-led-game/>

2.4.1 Tutorial4

```

11 <Tutorial4.ino 11>≡
  /*
  Tutorial 4 Digital Input and Output Game
  In this game, the LED will loop from white, yellow, green, red
  then back to white. The goal is to press the push button at the exact
  moment when the green LED is ON. Each time you got it right, the LED
  will speed up and the difficulty will increase.
  */
  int currentLED = 2;
  int delayValue = 200;
  void setup() {
    // initialize digital pin 12 as input;
    pinMode(12, INPUT); // button input
    // initialize digital pin 2 to 5 as output:
    pinMode(2, OUTPUT); // white LED
    pinMode(3, OUTPUT); // yellow LED
    pinMode(4, OUTPUT); // green LED
    pinMode(5, OUTPUT); // red LED
  }
  int checkInput() {
    if (digitalRead(12) == 0) {
      return 1;
    } else {
      return 0;
    }
  }
  void loop(){

```

```
// Check if the button is press at the right moment
if (digitalRead(12) == 0) {
  if (currentLED == 4) {
    // Blink the correct (green) LED
    digitalWrite(4, HIGH);
    delay(200);
    digitalWrite(4, LOW);
    delay(200);
    digitalWrite(4, HIGH);
    delay(200);
    digitalWrite(4, LOW);
    delay(200);
    // Speed up the LEDs
    delayValue = delayValue - 20;
  } else {
    // Blink the wrong LED
    digitalWrite(currentLED, HIGH);
    delay(200);
    digitalWrite(currentLED, LOW);
    delay(200);
    digitalWrite(currentLED, HIGH);
    delay(200);
    digitalWrite(currentLED, LOW);
    delay(200);
  }
}
// Loop LED from white > yellow > green > red
digitalWrite(currentLED, HIGH);
delay(delayValue);
digitalWrite(currentLED, LOW);
delay(delayValue);
currentLED = currentLED + 1;
if (currentLED > 5) {
  currentLED = 2;
}
}
```

2.4.2 game.txt

```
13 <game.txt 13>≡
  \ game.txt Digital Input and Output Game      DaR 2014-02-20
  chop-game
  marker chop-game
  variable delayValue
  : game ( --- cycles LEDs and check button presses ) \LEDS
    LEADS count for aft count >r count r> PoBiOut then next drop
    PortB buttonPin PoBiIn 200 delayValue !
    begin LEADS count for aft count >r count r>
      2dup delayValue @ rot rot cycle
      PortB buttonPin PoBiRead 0 = if
        rot dup LEADS count 1 - 2* += if
          delayValue @ 20 - dup 0 = if
            ." You win!" 2drop drop exit
          then delayValue !
        then rot rot
        2dup 200 rot rot cycle
        2dup 200 rot rot cycle
      then
      2drop ?key if
        drop exit
      then
    then next drop again ;
  flush
```

Things to note here:

1. A pointer can easily serve as an index. You just have to use something a little less opaque than a number for comparison. Typically, that comparison value can be computed, which is certainly a requirement for using this technique.
2. The use of multiple **exits** with an endless **again** loop is common in Forth and not something that should be frowned upon as it is with other languages.
3. Unfortunately, this technique appears to also have an issue, like **until** does, as was discussed earlier. In this case, the chip reboots as soon as a key is pressed, or when you win. In the later case, the message doesn't even get a chance to finish.

2.5 Tutorial 5: Building Voltage Meter

<http://tinyurl.com/megobz3/tutorial-5-building-voltage-meter/>

2.5.1 Tutorial5

```

14  <Tutorial5.ino 14>≡
    /*
      Tutorial 5: Volt Meter
    */
    int sensorPin = A0;    // select the analog input pin
    int sensorValue = 0;  // variable to store the value coming from the sensor
    float sensorVoltage = 0; // variable to store the voltage coming from the sensor
    void setup() {
      Serial.begin(9600); // start serial for output
    }
    void loop() {
      // Read the value from the analog input pin
      // A value of 1023 = 5V, a value of 0 = 0V
      int sensorValue = analogRead(sensorPin);
      // Convert sensor value to voltage
      float sensorVoltage= sensorValue*(5.0/1023.0);
      // print sensor value
      Serial.print("The voltage is ");
      Serial.println(sensorVoltage);
      // delay by 1000 milliseconds:
      delay(1000);
    }

```

2.6 Tutorial 6: Using Buzzer to Play a Melody

<http://tinyurl.com/megobz3/tutorial-6-using-buzzer-to-play-a-melody/>

2.6.1 Tutorial6a

```
15 <Tutorial6a.ino 15>≡
  /* Tutorial 6a: Simple Scale Sweep */
  int buzzerPin = 8; // Using digital pin 8
  #define NOTE_C6 1047
  #define NOTE_D6 1175
  #define NOTE_E6 1319
  #define NOTE_F6 1397
  #define NOTE_G6 1568
  #define NOTE_A6 1760
  #define NOTE_B6 1976
  #define NOTE_C7 2093
  void setup() {
    // nothing to setup
  }
  void loop() {
    //tone(pin, frequency, duration)
    tone(buzzerPin, NOTE_C6, 500);
    delay(500);
    tone(buzzerPin, NOTE_D6, 500);
    delay(500);
    tone(buzzerPin, NOTE_E6, 500);
    delay(500);
    tone(buzzerPin, NOTE_F6, 500);
    delay(500);
    tone(buzzerPin, NOTE_G6, 500);
    delay(500);
    tone(buzzerPin, NOTE_A6, 500);
    delay(500);
    tone(buzzerPin, NOTE_B6, 500);
    delay(500);
    tone(buzzerPin, NOTE_C7, 500);
    delay(500);
  }
```

2.6.2 Tutorial6b

```
16 <pitches.h 16>≡
  /*****
   * Public Constants
   *****/
#define NOTE_B0 31
#define NOTE_C1 33
#define NOTE_CS1 35
#define NOTE_D1 37
#define NOTE_DS1 39
#define NOTE_E1 41
#define NOTE_F1 44
#define NOTE_FS1 46
#define NOTE_G1 49
#define NOTE_GS1 52
#define NOTE_A1 55
#define NOTE_AS1 58
#define NOTE_B1 62
#define NOTE_C2 65
#define NOTE_CS2 69
#define NOTE_D2 73
#define NOTE_DS2 78
#define NOTE_E2 82
#define NOTE_F2 87
#define NOTE_FS2 93
#define NOTE_G2 98
#define NOTE_GS2 104
#define NOTE_A2 110
#define NOTE_AS2 117
#define NOTE_B2 123
#define NOTE_C3 131
#define NOTE_CS3 139
#define NOTE_D3 147
#define NOTE_DS3 156
#define NOTE_E3 165
#define NOTE_F3 175
#define NOTE_FS3 185
#define NOTE_G3 196
#define NOTE_GS3 208
#define NOTE_A3 220
#define NOTE_AS3 233
#define NOTE_B3 247
#define NOTE_C4 262
#define NOTE_CS4 277
#define NOTE_D4 294
```

```
#define NOTE_DS4 311
#define NOTE_E4 330
#define NOTE_F4 349
#define NOTE_FS4 370
#define NOTE_G4 392
#define NOTE_GS4 415
#define NOTE_A4 440
#define NOTE_AS4 466
#define NOTE_B4 494
#define NOTE_C5 523
#define NOTE_CS5 554
#define NOTE_D5 587
#define NOTE_DS5 622
#define NOTE_E5 659
#define NOTE_F5 698
#define NOTE_FS5 740
#define NOTE_G5 784
#define NOTE_GS5 831
#define NOTE_A5 880
#define NOTE_AS5 932
#define NOTE_B5 988
#define NOTE_C6 1047
#define NOTE_CS6 1109
#define NOTE_D6 1175
#define NOTE_DS6 1245
#define NOTE_E6 1319
#define NOTE_F6 1397
#define NOTE_FS6 1480
#define NOTE_G6 1568
#define NOTE_GS6 1661
#define NOTE_A6 1760
#define NOTE_AS6 1865
#define NOTE_B6 1976
#define NOTE_C7 2093
#define NOTE_CS7 2217
#define NOTE_D7 2349
#define NOTE_DS7 2489
#define NOTE_E7 2637
#define NOTE_F7 2794
#define NOTE_FS7 2960
#define NOTE_G7 3136
#define NOTE_GS7 3322
#define NOTE_A7 3520
#define NOTE_AS7 3729
#define NOTE_B7 3951
#define NOTE_C8 4186
```

```
#define NOTE_CS8 4435
#define NOTE_D8 4699
#define NOTE_DS8 4978
```

```
18 <Tutorial6b.ino 18>≡
/* Tutorial 6b: Playing an Melody */
#include "pitches.h"
// notes in the melody:
int melody[] = { NOTE_C4, NOTE_G3,NOTE_G3, NOTE_A3, NOTE_G3,0, NOTE_B3, NOTE_C4};
// note durations: 4 = quarter note, 8 = eighth note, etc.:
int noteDurations[] = {4, 8, 8, 4,4,4,4,4 };
void setup() {
  // iterate over the notes of the melody:
  for (int thisNote = 0; thisNote < 8; thisNote++) {
    // to calculate the note duration, take one second
    // divided by the note type.
    //e.g. quarter note = 1000 / 4, eighth note = 1000/8, etc.
    int noteDuration = 1000/noteDurations[thisNote];
    tone(8, melody[thisNote],noteDuration);
    // to distinguish the notes, set a minimum time between them.
    // the note's duration + 30% seems to work well:
    int pauseBetweenNotes = noteDuration * 1.30;
    delay(pauseBetweenNotes);
    // stop the tone playing:
    noTone(8);
  }
}
void loop() {
  // no need to repeat the melody.
}
```

2.7 Tutorial 7: Counting Down with a 7 Segment LED

<http://tinyurl.com/megobz3/tutorial-7-counting-down-with-a-7-segment-led/>

2.7.1 Tutorial7

```
19 <Tutorial7.ino 19>≡
  // Tutorial 7: 7 Segment LED
  //
  // Define the LED digit patterns, from 0 - 9
  // Note that these patterns are for common anode displays
  // 0 = LED on, 1 = LED off:
  // Digital pin: 2,3,4,5,6,7,8
  //           a,b,c,d,e,f,g
  byte seven_seg_digits[10][7] = { { 0,0,0,0,0,0,1 }, // = 0
                                    { 1,0,0,1,1,1,1 }, // = 1
                                    { 0,0,1,0,0,1,0 }, // = 2
                                    { 0,0,0,0,1,1,0 }, // = 3
                                    { 1,0,0,1,1,0,0 }, // = 4
                                    { 0,1,0,0,1,0,0 }, // = 5
                                    { 0,1,0,0,0,0,0 }, // = 6
                                    { 0,0,0,1,1,1,1 }, // = 7
                                    { 0,0,0,0,0,0,0 }, // = 8
                                    { 0,0,0,1,1,0,0 } // = 9
  };

  void setup() {
    pinMode(2, OUTPUT);
    pinMode(3, OUTPUT);
    pinMode(4, OUTPUT);
    pinMode(5, OUTPUT);
    pinMode(6, OUTPUT);
    pinMode(7, OUTPUT);
    pinMode(8, OUTPUT); }
  void sevenSegWrite(byte digit) {
    byte pin = 2;
    for (byte segCount = 0; segCount < 7; ++segCount) {
      digitalWrite(pin, seven_seg_digits[digit][segCount]);
      ++pin;
    }
  }
  void loop() {
    for (byte count = 10; count > 0; --count) {
      delay(1000);
      sevenSegWrite(count - 1);
    }
    delay(3000);
  }
```

```
}

```

2.8 Subsection Title

Text that is specific to the Foo version of the document.

```
20a <foo 20a>≡
    echo "Foo portion"
    <common 20c>
```

Text that is common to both versions of the document.

```
20b <script 20b>≡
    echo "Say what this is doing..."
    if [ -x Foo ]; then # Foo specific section
        echo "This is Foo"
        foo
    else # Bar specific section
        echo "This is Bar"
        bar
    fi
```

```
20c <common 20c>≡
    echo "Common to both"
```

(? 20a)

2.8.1 SubSubsection Title

A script for converting this document to PDF form:

```
20d <final 20d>≡
    lyx -e literate $1.lyx
    noweave -delay -index "$1.nw" > "$1.tex"
    pdflatex $1 latex=pdflatex
```

For marking the output with a PRELIMINARY watermark:

```
20e <preliminary 20e>≡
    echo "Make $1 PDF release notes..."
    ./final $1
    pdftk $1.pdf stamp Preliminary.pdf output out.pdf
    rm $1.pdf
    mv out.pdf $1.pdf
```

Each of these scripts can be pulled out manually given the default * script defined below.

```
21a <* 21a>≡
    echo "Extract script $2 from $1.lyx..."
    rm -f $1.nw
    lyx -e literate $1.lyx
    notangle -t4 -R$2 $1.nw > $2
    chmod a+x $2
```

Once that script is pulled out and named extract, the following script can pull out all of the other scripts:

```
21b <extract-all 21b>≡
    echo "Extract all scripts..."
    sedArgs="s/\(.*\)\\.idx:.*entry{\(.*\)|hyper.*\/\1 \2/g"
    find . -type f -name \*idx | \
    xargs grep "indexentry" | \
    sed -e "$sedArgs" | \
    xargs -n 2 ./extract
```

Index

button.txt, 10

cycle.txt, 8

extract-all, 21

final, 20

game.txt, 13

preliminary, 20

PRELIMINARY